



ThermalRock B (Blanket)

General Product Information

ROCKWOOL stone wool products are made of basalt, a volcanic stone.

ROCKWOOL stone wool products are non-combustible with a melting point more than 1000°C. They are particularly suitable for thermal insulation, fire protection and sound reduction/absorption.

ROCKWOOL stone wool is inorganic and contains no nutritious substance. Therefore it will not be attacked by microorganisms. Stone wool will not rot and does not attract vermin.

No CFCs, HFCs, HCFCs, or asbestos are used in the manufacture of ROCKWOOL stone wool products.



SGBR 2012-091
SGBR 2012-092
SGBR 2012-093
SGBR 2012-094
SGBR 2012-104

ThermalRock B (Blanket)

Common applications

ThermalRock B is manufactured in a wide variety of thicknesses and densities to suit most requirements, suitable for general application in residential, commercial and industrial buildings.

Dimensions

Product Type	Thickness (mm)	Length x Width (mm)
B40	50	5000 x 1200
	50	7500 x 1200
B50	50	5000 x 1200
	50	7500 x 1200
B60	50	5000 x 1200
	50	7500 x 1200
B80	25	8000 x 1200
	25	10000 x 1200
	50	5000 x 1200
	50	7500 x 1200
B100	25	5000 x 1200
	50	8000 x 1200
	50	4000 x 1200

Note: Please contact your local representatives for the specific densities and thicknesses that are available locally.

Technical Parameters

Product Types	B40	B50	B60	B80	B100	Standard
Nominal Density (kg/m ³)	40	50	60	80	100	
Thermal Conductivity (W/mK)*	0.036	0.035	0.034	0.034	0.035	ASTM C518
Sound Absorption	Please contact your local representative for more information					ISO 354
Fire Performance	Non-combustible / Euro Class A1 (without facing)					EN 13501-1
Water Vapour Absorption [Moisture Resistance]	< 0.04 %, by volume					ASTM C1104/C1104M
Water Absorption [Partial Immersion]	< 1.0 kg/m ²					EN 1609


* Thermal conductivity is tested at mean temperature of 20°C in accordance with ASTM C518 by external accredited laboratory. It is recommended to have a safety factor of 20% as design value.

Facings

ThermalRock B products are available in plain, aluminium foil facings and one-sided glass tissue facings.

Packaging and storage

ThermalRock B is supplied in folded or roll form (depending on factory) and shrink-wrapped in polyethylene sheets for ease of handling, transportation, storage and identification. Products should be stored indoors or under a waterproof covering.

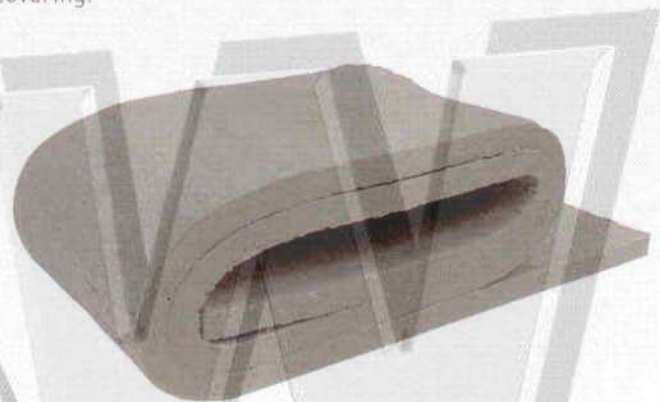

www.rockwoolasia.com

ROCKWOOL Malaysia Sdn Bhd
Lot 4, Solok Waja 1
Bukit Raja Industrial Estate
41050 Klang, Selangor
Malaysia
T [+60] 3 3341 3444
F [+60] 3 3342 7290

ROCKWOOL Malaysia Sdn Bhd
175 A&B
Kawasan Perindustrian
Air Keroh, Jalan Lingkungan
Usaha, 75450 Melaka
Malaysia
T [+60] 6 233 2010
F [+60] 6 233 2012

ROCKWOOL (Thailand) Limited
HemaraJ Eastern Industrial
Estate (Map Ta Phut)
1 Soi G 2, Pakornsongkrohraj
Road, Huaypong, Muang
Rayong 21150
Thailand
T [+66] 3868 5110
F [+66] 3868 4938

Disclaimer: The information contained in this data sheet is believed to be correct at the date of publication. ROCKWOOL does not accept responsibility for the consequences of using ThermalRock B in applications different from those described above.